



LED BULB



**BAYI
GLOBAL**



BULB

Fashionable design

Special design of dispersion of heat, Use imported Aluminum die-casing shell, fashionable style

Started quickly

Started quickly, no flicker, no UV



Excellent optics lens

High lumens, use frosted housing and soft light with high CRI

Constant current driver, high efficiency

Driver is designed by constant current, high efficiency of driver





LED BULB



Certificate



Save **90%** power compared
incandescent lamp

Energy-saving, can save 90% power compared
incandescent lamp

long life driver

Long life span, 16 times working
life than traditional incandescent
light

Green and energy-saving



Green and energy-saving product, recycling





FL SERIES

Product Type	BY-FL3/4W-GAPC	BY-FL3/5W-GBPC
Nominal Wattage	4W	5W
LED Quantities	3	3
Operating Voltage	DC 10-30V	AC 100-240V
Frequency	/	50Hz/60Hz
Luminous Flux	210 lm	210 lm
Color Temperature	2800-6500K	2800-6500K
Color Rendering Index	≥75%	≥75%
Power Facto	/	/
Power Efficiency	90%	80%
Viewing Angle	E26/E27	E26/E27
Size	54x105 mm	54x105 mm
Weight	0.10kg	0.10kg
Operating Temperature	-25°C~45°C	-25°C~45°C
LED working life	50000H	50000H

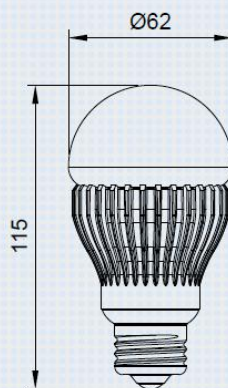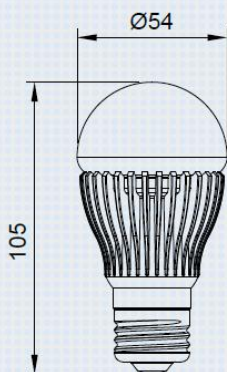



LED BULB



FL SERIES

Product Type	<i>BY-FL5/6W-GAPC</i>	<i>BY-FL7/8W-GAPC</i>	<i>BY-FL5/7W-GBPC</i>	<i>BY-FL7/9W-GBPC</i>
Nominal Wattage	6W	8W	7W	9W
LED Quantities	5	7	5	7
Operating Voltage	DC 10-30V	DC 10-30V	AC 100-240V	AC 100-240V
Frequency	/	/	50Hz/60Hz	50Hz/60Hz
Luminous Flux	350 lm	490 lm	350 lm	490 lm
Color Temperature	2800-6500K	2800-6500K	2800-6500K	2800-6500K
Color Rendering Index	≥75%	≥75%	≥75%	≥75%
Power Factor	/	/	/	/
Power Efficiency	90%	90%	80%	80%
Viewing Angle	E26/E27	E26/E27	E26/E27	E26/E27
Size	62x115 mm	62x115 mm	70x138 mm	70x138 mm
Weight	0.20kg	0.30kg	0.20kg	0.30kg
Operating Temperature	-25°C~45°C	-25°C~45°C	-25°C~45°C	-25°C~45°C
LED working life	50000H	50000H	50000H	50000H

