

ET MODULE

Polycrystalline

ET-P672300WW	300W
ET-P672295WW	295W
ET-P672290WW	290W
ET-P672285WW	285W
ET-P672280WW	280W
ET-P672275WW	275W
ET-P672270WW	270W




Features

- High module conversion efficiency, through superior manufacturing technology
- 0 to +5W positive tolerance for mainstream products
- Withstand high wind loads and snow loads
- Anodized aluminum improving corrosion resistance
- Anti-reflective highly transparent, low iron tempered glass
- Excellent performance under low light conditions

Benefits

- 25-year linear performance warranty; 10-year warranty on materials and workmanship
- Product liability insurance
- Local technical support
- Local warehousing
- 48 hour-response service
- Enhanced design for easy installation and long-term reliability

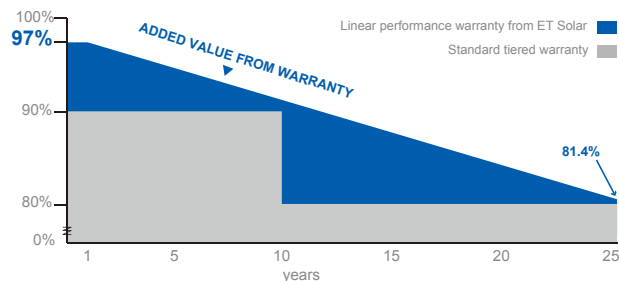

IEC 61215 Ed.2
IEC 61730
IEC 61701



The DLG certificate is estimated to be received in April

M/ET-SPS-EN-EU2012V2-F

www.etsolar.com

ELECTRICAL SPECIFICATIONS



Model Type	ET-P672300WW	ET-P672295WW	ET-P672290WW	ET-P672285WW	ET-P672280WW	ET-P672275WW	ET-P672270WW
Peak Power (Pmax)	300W	295W	290W	285W	280W	275W	270W
Module Efficiency	15.46%	15.20%	14.95%	14.69%	14.43%	14.17%	13.92%
Maximum Power Voltage (Vmp)	36.10V	35.59V	35.46V	35.28V	34.96V	34.95V	34.90V
Maximum Power Current (Imp)	8.31A	8.29A	8.18A	8.08A	8.01A	7.87A	7.74A
Open Circuit Voltage (Voc)	45.10V	44.80V	44.80V	44.76V	44.21V	44.12V	44.04V
Short Circuit Current (Isc)	8.98A	8.80A	8.71A	8.60A	8.58A	8.41A	8.29A
Power Tolerance	±3%	-1% to +3%	0 to +5W	0 to +5W	0 to +5W	0 to +5W	0 to +5W
Maximum System Voltage	DC 1000V						
Normal Operating Cell Temperature	45.3±2℃						
Series Fuse Rating (A)	20A						
Number of Bypass Diode	3						

MECHANICAL SPECIFICATIONS


Cell type	156mm x 156mm
Number of cells	72 cells in series
Weight	24.07 kg(53.08 lbs) / 23.05kg (50.82 lbs)
Dimensions	1956×992×50mm (77.01×39.06×1.97inch) 1956×992×40mm (77.01×39.06×1.57 inch)
Max Load	5400Pascals (112 lb/ft²)

TEMPERATURE COEFFICIENT

Temp. Coeff. of Isc (TK Isc)	0.065 %/℃
Temp. Coeff. of Voc (TK Voc)	-0.346 %/℃
Temp. Coeff. of Pmax (TK Pmax)	-0.46 %/℃


PHYSICAL CHARACTERISTICS Unit:mm (inch)

* The former size is for 50mm frame module while the later size for 40mm frame module

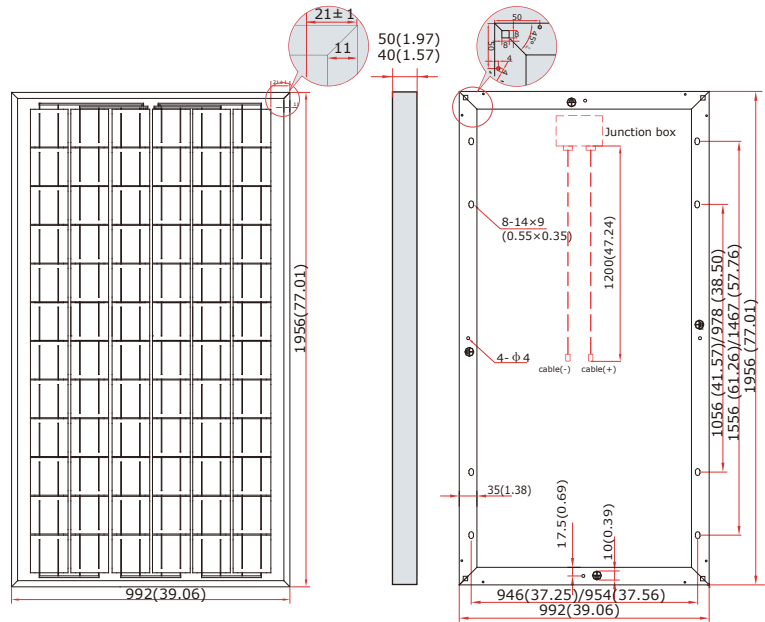


ELECTRICAL CHARACTERISTICS


Electrical performance
(cell temperature:25℃)

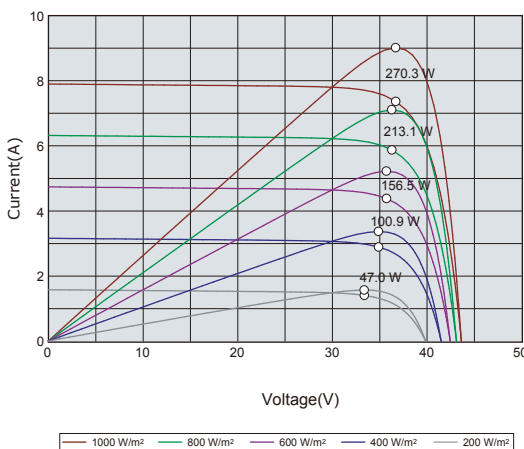

Temperature dependence of Isc,
Voc and Pmax

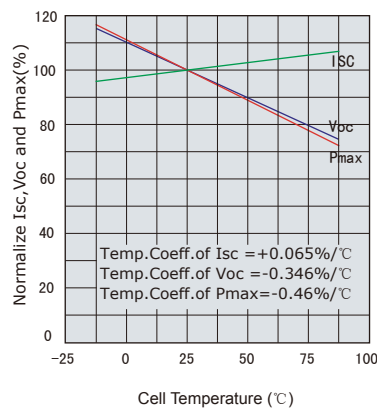

Irradiance dependence of Isc,
Voc and Pmax (cell temperature:25℃)

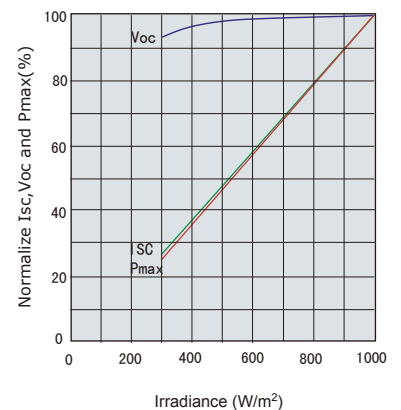

Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m² solar irradiance, 1.5 Air Mass, and cell temperature of 25℃.

The NOCT is obtained under the Test Conditions : 800 W/m², 20℃ ambient temperature, 1 m/s wind speed, AM 1.5 spectrum.

Please contact support@etsolar.com for technical support. The parameters are for reference only, and are subject to change without notice or obligation.